

YPC-Series - Valve Regulated Lead Acid Battery


YPC22-12

SPECIFICATIONS		
Nominal voltage	12	V
20-hr rate Capacity to 10.5V at 20°C	22	Ah
10-hr rate Capacity to 10.8V at 20°C	19.4	Ah
DIMENSIONS		
Length	181.5 (±1)	mm
Width	77 (±1)	mm
Height	166.5 (±2)	mm
(height over terminals)	N/A	mm
Mass (typical)	6.9	kg
TERMINAL TYPE		
Female threaded terminal	M5	mm
Torque	3	Nm
OPERATING TEMPERATURE RANGE		
Storage (in fully charged condition)	-20°C to +60°C	
Charge	-15°C to +50°C	
Discharge	-20°C to +60°C	
STORAGE		
Capacity loss per month at 20°C (approx)	3	%
CASE MATERIAL		
Standard Option	ABS (UL.94:HB)	
Flame retardant option (FR)	ABS (UL94:V0)	
CHARGE VOLTAGE		
Float charge voltage at 20°C	13.65 (±1%)	V
	2.275 (±1%)	V/cell
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C
Cyclic (or Boost) charge at 20°C	14.5 (±3%)	V
	2.42 (±3%)	V/cell
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C
CHARGE CURRENT		
Float charge current limit	No limit	A
Cyclic (or Boost) charge current limit	5.50	A
MAXIMUM DISCHARGE CURRENT		
1 second	300	A
1 minute	220	A
CYCLIC LIFE DATA		
100% DOD down to 80% capacity	300	cycles
75% DOD down to 80% capacity	500	cycles
50% DOD down to 80% capacity	600	cycles
25% DOD down to 80% capacity	1400	cycles
IMPEDANCE		
Measured at 1 kHz	15	m
PERFORMANCE & CHARACTERISTICS		
Refer to the technical short form	YPC	
DESIGN LIFE		
EUROBAT Classification: Standard Commercial	3 to 5	years
SAFETY		
Installation	Can be installed and operated in any orientation except permanently inverted	
Handles	Batteries must not be left permanently suspended by their handles (where fitted)	
Vent valves	Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.	
Gas Release	VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container	
Recycling	YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations	

Data Sheet




LAYOUT

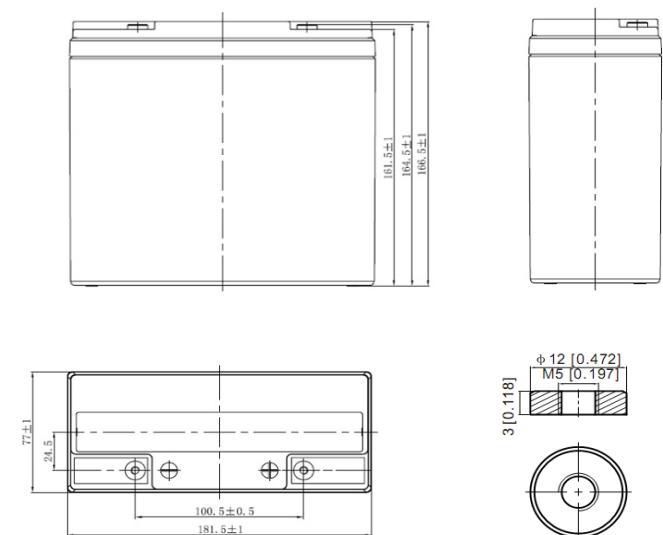

3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems
 ISO 14001 - Environmental Management Systems
 EN 18001 - OHSAS Management Systems



UNDERWRITERS LABORATORIES Inc.

STANDARDS

IEC61056
 IEC60895-21/22



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE
 Issue No.: V.5 / Issue Date: Mar 2012



YUASA BATTERY SALES UK LTD.
 Unit 13, Hunts Rise
 South Marston Industrial Estate
 Swindon
 SN3 4TG
 UK