


BCI GROUP SIZE	TYPE	VOLTAGE	CAPACITY ^A Amp-Hours (AH)			KILOWATT (kWh)	TERMINAL Type	DIMENSIONS ^B Inches (mm)			WEIGHT lbs. (kg)
			5-Hr Rate	20-Hr Rate	100-Hr Rate			Length	Width	Height ^C	
DEEP CYCLE BATTERIES - with T2 TECHNOLOGY™											
903	L16RE-2V*	2 VOLT	909	1110	1235	2.47	5	11-5/8 (295)	7 (178)	17-11/16 (450)	119 (54)
GC2	T-605	6 VOLT	175	210	232	1.39	1, 2, 3, 4	10-3/8 (264)	7-1/8 (181)	10-7/8 (276)	58 (26)
GC2	T-105	6 VOLT	185	225	250	1.50	1, 2, 3, 4, 5	10-3/8 (264)	7-1/8 (181)	10-7/8 (276)	62 (28)
GC2H	T105-RE	6 VOLT	185	225	250	1.50	5	10-3/8 (264)	7-1/8 (181)	11-3/4 (299)	67 (30)
GC2	T-125	6 VOLT	195	240	266	1.60	1, 2, 3, 4	10-3/8 (264)	7-1/8 (181)	10-7/8 (276)	66 (30)
GC2H	T-145	6 VOLT	215	260	287	1.72	1, 2, 3, 4	10-3/8 (264)	7-1/8 (181)	11-5/8 (295)	72 (33)
DIN	TE35	6 VOLT	200	245	271	1.63	8	9-5/8 (244)	7-1/2 (191)	10-7/8 (276)	68 (31)
902	J305P-AC*	6 VOLT	271	330	367	2.20	6	11-5/8 (295)	7 (178)	14-3/8 (365)	96 (44)
902	J305H-AC*	6 VOLT	295	360	400	2.40	6	11-5/8 (295)	7 (178)	14-3/8 (365)	98 (45)
903	L16P-AC*	6 VOLT	344	420	467	2.80	6	11-5/8 (295)	7 (178)	16-3/4 (424)	114 (52)
903	L16H-AC*	6 VOLT	357	435	483	2.89	6	11-5/8 (295)	7 (178)	16-3/4 (424)	125 (57)
903	L16RE-A*	6 VOLT	267	325	360	2.16	5	11-5/8 (295)	7 (178)	17-11/16 (450)	115 (52)
903	L16RE-B*	6 VOLT	303	370	410	2.46	5	11-5/8 (295)	7 (178)	17-11/16 (450)	118 (54)
24	24TMX	12 VOLT	70	85	94	1.13	5, 9	11-1/4 (286)	6-3/4 (171)	9-3/4 (248)	47 (21)
27	27TMX	12 VOLT	85	105	117	1.40	5, 9	12-3/4 (324)	6-3/4 (171)	9-3/4 (248)	55 (25)
27	27TMH	12 VOLT	95	115	128	1.54	5, 7, 8, 9	12-3/4 (324)	6-3/4 (171)	9-3/4 (248)	61 (28)
30H	30XHS	12 VOLT	105	130	144	1.73	5, 7, 8, 9	13-15/16 (355)	6-3/4 (171)	10-1/16 (256)	66 (30)
N/A	J150	12 VOLT	120	150	166	1.99	1, 2	13-13/16 (351)	7-1/8 (181)	11-1/8 (283)	84 (38)
921	J185P-AC*	12 VOLT	168	205	226	2.71	6	15 (381)	7 (178)	14-5/8 (371)	114 (52)
921	J185H-AC*	12 VOLT	185	225	249	2.99	6	15 (381)	7 (178)	14-5/8 (371)	128 (58)
N/A	DC-500ML**	12 VOLT	361	450	500	6.00	5, 8	19-1/4 (489)	10-5/8 (270)	16-3/4 (425)	332 (151)
DEEP CYCLE GEL BATTERIES											
GC2	6V-GEL	6 VOLT	154	189	198	1.19	7	10-1/4 (260)	7-1/8 (181)	10-7/8 (276)	68 (31)
DIN	TE35-GEL	6 VOLT	180	210	220	1.32	5, 8	9-5/8 (244)	7-1/2 (190)	10-7/8 (276)	69 (31)
8D	8D-GEL	12 VOLT	188	225	265	3.18	5	21-1/16 (534)	11 (279)	10-13/16 (233)	157 (71)
24	24-GEL	12 VOLT	66	77	85	1.02	6, 7	10-7/8 (276)	6-3/4 (171)	9-5/16 (236)	52 (24)
27	27-GEL	12 VOLT	76	91	100	1.20	7	12-3/4 (324)	6-3/4 (171)	9-1/4 (234)	63 (29)
31	31-GEL	12 VOLT	85	102	108	1.30	7	12-15/16 (329)	6-3/4 (171)	9-5/8 (245)	69 (31)
DIN	55HP-GEL	12 VOLT	110	125	137	1.64	5, 8	13-9/16 (345)	6-3/4 (171)	11-1/8 (283)	85 (39)
DEEP CYCLE AGM BATTERIES											
24	24-AGM	12 VOLT	67	76	84	1.01	6	10-3/4 (274)	6-13/16 (174)	8-11/16 (220)	54 (24)
27	27-AGM	12 VOLT	77	89	99	1.19	6	12-9/16 (318)	6-13/16 (174)	8-3/4 (221)	64 (29)
31	31-AGM	12 VOLT	82	100	111	1.33	6	13-7/16 (341)	6-13/16 (174)	9-3/16 (233)	69 (31)
DUAL PURPOSE AGM BATTERIES											
GC2	6V-AGM	6 VOLT	154	200	221	1.33	6	10-1/4 (260)	7-1/8 (181)	10-3/4 (274)	65 (29)
8D	8D-AGM	12 VOLT	179	230	254	3.05	6	20-1/2 (521)	10-9/16 (269)	9-3/16 (233)	167 (76)



A. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20-Hour and 86°F (30°C) for the 5-Hour rate and maintain a voltage above 1.75V/cell. Capacities are based on nominal performance.
 B. Dimensions are based on nominal size. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7mm) spacing minimum.
 C. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
 * Polyon™ Case.
 ** Unavailable with T2 Technology.

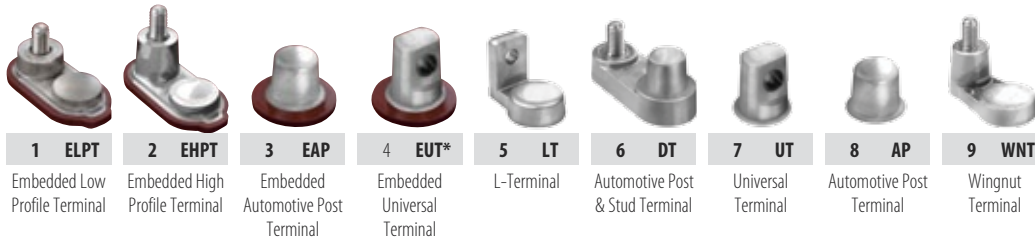

Trojan batteries are available worldwide.
 We offer outstanding technical support, provided by full-time application engineers.
**For a Trojan Distributor near you,
 call 800.423.6569 or + 1.562.236.3000 or visit www.trojanbatteryre.com**